


➤ ALÜMİNYUM HEPA FİLTRELER ALUMINIUM HEPA FILTERS

E10 / E11 / E12 / H13 / H14

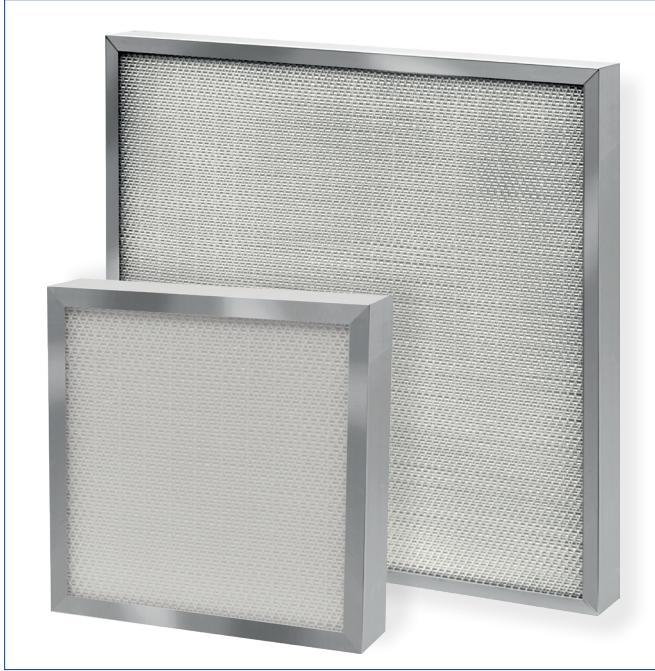

Product Code	Filter Class (EN 1822)	Dimensions			Pleat (mm) Height	Filtration Area (m²)	Air Volume (m³/h)	Initial Pressure Drop (Pa)
		W (mm)	H (mm)	D (mm)				
HAL-H13-305x305x69-PH50-PU-F1	H13	305	305	69	50	2,3	150	100
HAL-H13-457x457x69-PH50-PU-F1	H13	457	457	69	50	5,1	340	100
HAL-H13-575x575x69-PH50-PU-F1	H13	575	575	69	50	8,0	535	100
HAL-H13-610x610x69-PH50-PU-F1	H13	610	610	69	50	9,0	600	100
HAL-H14-305x305x69-PH50-PU-F1	H14	305	305	69	50	2,4	150	125
HAL-H14-457x457x69-PH50-PU-F1	H14	457	457	69	50	5,3	340	125
HAL-H14-575x575x69-PH50-PU-F1	H14	575	575	69	50	8,4	535	125
HAL-H14-610x610x69-PH50-PU-F1	H14	610	610	69	50	9,4	600	125

HAL - H14 - 610x610x69 - PH50 - PU - F1

Filter Type
HAL: Alu. Frame Hepa

Filter class (EN 1822)
E10 - E11 - E12 - H13 - H14

Width x Height x Depth
(mm) (mm) (mm)

Faceguard:
0: Without
1: One Side
2: Two Side

Gasket Type:
PU: Polyurethane EP: EPDM

Pleat Height:
50mm 75mm 90mm 125mm
65mm 85mm 100mm

Özellikler :

- Yüksek Verimlilik
- Glass Fiber
- Hot Melt Teknolojisi
- Kesintisiz Conta
- Yüksek Hava Debisinde Dayanım

Uygulamalar :



- Hastaneler
- İlaç Üretim Alanları
- Temiz Odalar
- Mikrobiyoloji Laboratuvarları
- Gıda Endüstrisi
- Yarı İletken Üretim Alanları
- Nükleer Enerji Santralleri

Specifications :


- Submicron Micro-Glass Fibres
- Hot Melt Technology
- One-Piece Gasket
- High Mechanical Stability

Applications :

- Medicine
- Pharmaceutical Industry
- Clean Rooms
- Microbiology
- Food, Bottled Water and Juice Industry
- Nuclear Power Techniques

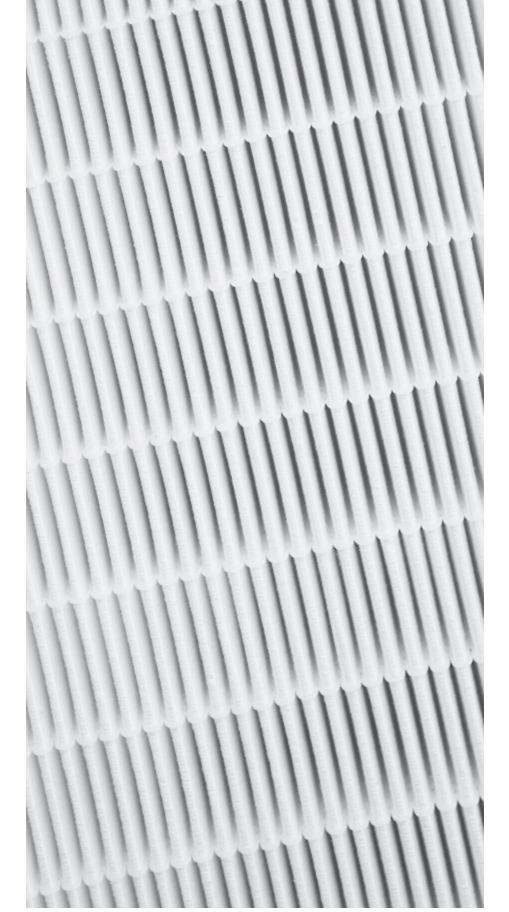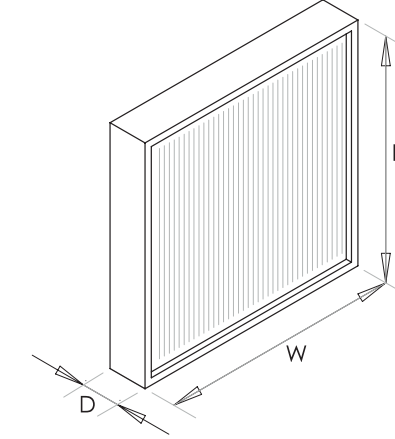

Filter Values
(Acc. to EN 1822)

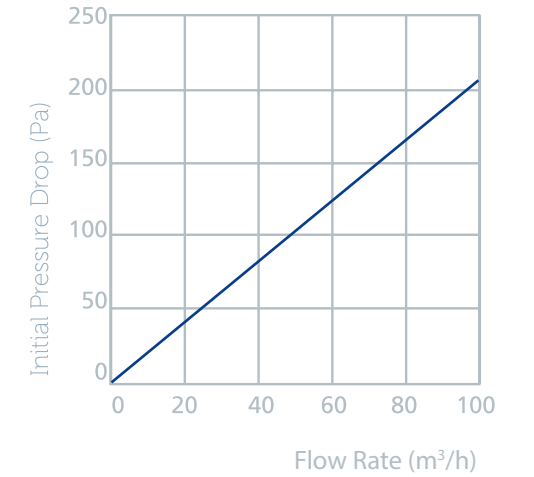

	E11	H13
Av. Arrestance (%)	>99	>99
Av. Efficiency	>95,0	>99,95
Final Pressure Drop (Pa)	750	750
Operating Temp. (°C)	80	80
Filter Depth	46/54/78	292
+ Gasket	+8	+8