
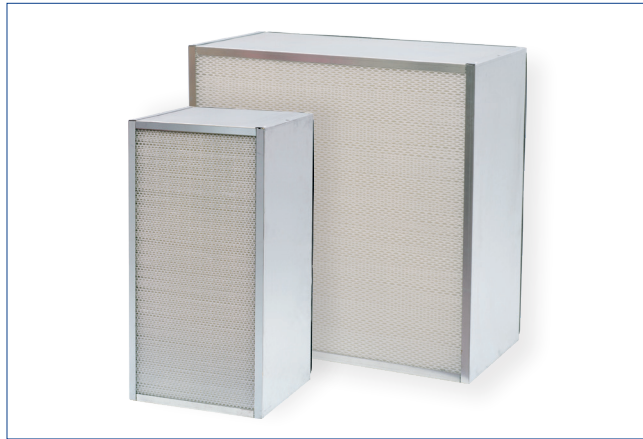


➤ METAL HEPA FİLTRELER METAL HEPA FILTERS

E10 / E11 / E12 / H13 / H14

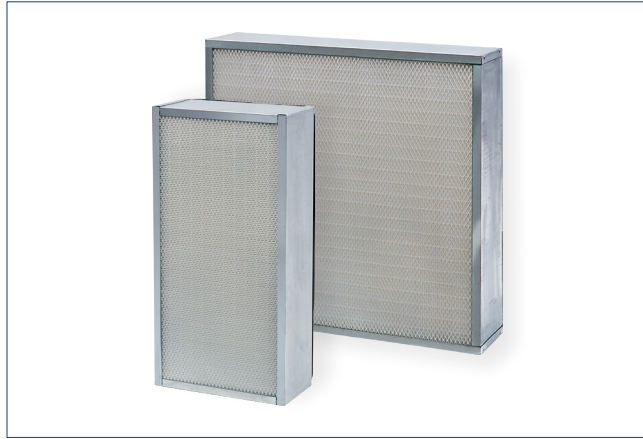

Product Code	Filter Class (EN 1822)	Dimensions			Pleat (mm) Height	Filtration Area (m²)	Air Volume (m³/h)	Initial Pressure Drop (Pa)
		W (mm)	H (mm)	D (mm)				
HMT-H13-G-305x610x292-PH125-PU-F1	H13	305	610	292	125	9,0	1000	240
HMT-H13-G-610x610x292-PH125-PU-F1	H13	610	610	292	125	18,0	2000	240
HMT-H14-G-305x610x292-PH125-PU-F1	H14	305	610	292	125	10,0	1000	250
HMT-H14-G-610x610x292-PH125-PU-F1	H14	610	610	292	125	20,0	2000	250

HMT - H13 - G - 610x610x292 - PH50 - PU - F1

Filter Type:
HMT: Metal Frame Hepa

Filter Class (EN1822):
E10 - E11 - E12 - H13 - H14

Frame Type:
G: Galvanised A:Aluminium S: S.Steel

Width x Height x Depth
(mm) (mm) (mm)

Pleat Height:
50mm 75mm 90mm 125mm
65mm 85mm 100mm

0: Without
Faceguard:
1: One Side
2: Two Side

Gasket Type:
PU: Polyurethane EP: EPDM

Özellikler :

- Yüksek Verimlilik
- Glass Fiber
- Hot Melt Teknolojisi
- Kesintisiz Conta
- Yüksek Hava Debisinde Dayanım

Uygulamalar :



- Hastaneler
- İlaç Üretim Alanları
- Temiz Odalar
- Mikrobiyoloji Laboratuvarları
- Gıda Endüstrisi
- Yarı İletken Üretim Alanları
- Nükleer Enerji Santralleri

Specifications :


- Submicron Micro-Glass Fibres
- Hot Melt Technology
- One-Piece Gasket
- High Mechanical Stability

Applications :

- Medicine
- Pharmaceutical Industry
- Clean Rooms
- Microbiology
- Food, Bottled Water and Juice Industry
- Nuclear Power Techniques

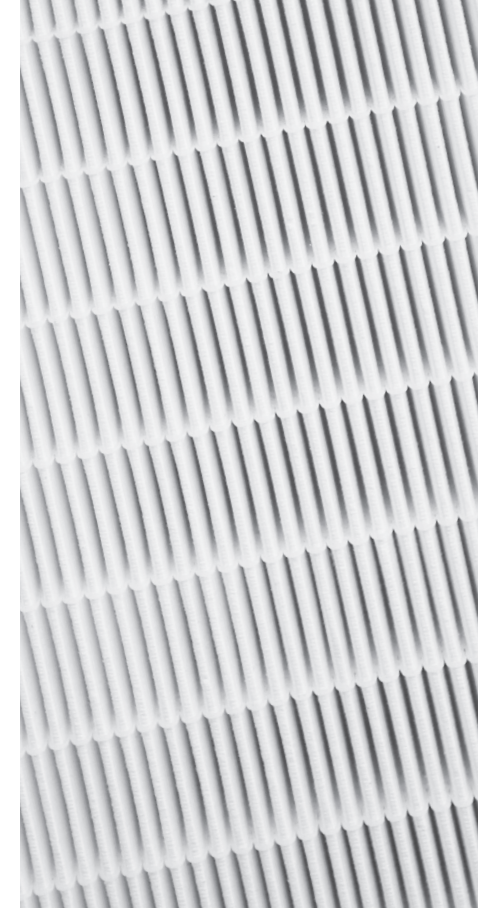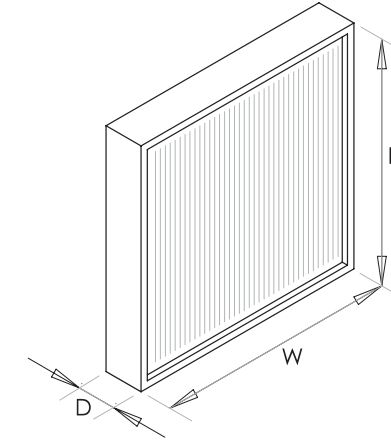

Filter Values
(Acc. to EN 1822)

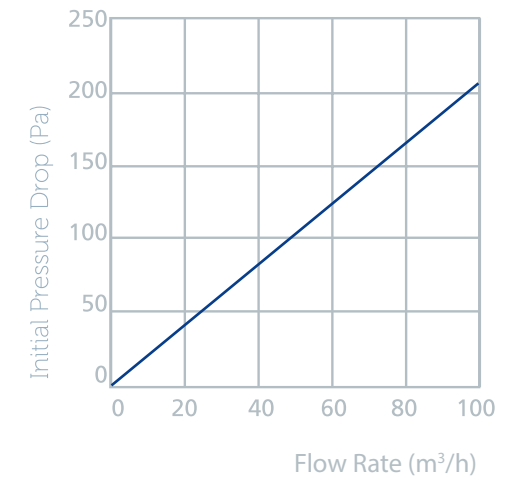

	E11	H13
Av. Arrestance (%)	>99	>99
Av. Efficiency	>95,0	>99,95
Final Pressure Drop (Pa)	750	750
Operating Temp. (°C)	80	80
Filter Depth	46/54/78	292
+ Gasket	+8	+8